

Specifications

Current rating: 0.5A AC,DC

Voltage rating: 50V AC,DC

Temperature range: -25°C ~ +85°C

Contact resistance: 100mΩ Max.

Insulation resistance: 500MΩ Min.

Withstanding voltage: 150V AC/minute

Contact H.R for details

Ordering code

① ② ③ ④
F0504 WR-S-30P

- ① Series No.
- ② Connector type: WR=Right angle
- ③ Mounting type: S=SMT
- ④ No. of circuits



F0504 SERIES

0.50mm pitch FFC/FPC connector





F0504WR-S




0.50mm pitch FFC/FPC 90° Connector, ZIF, SMT TYPE, _____
Bottom Contact Style

Reference Informations:

- *Material: Pin: Phosphor Bronze/Gold-plated
- Solder Tabs: Phosphor Bronze/Gold-flash
- Housing: LCP,UL94V-0
- Actuator: Nylon 6T,UL94V-0

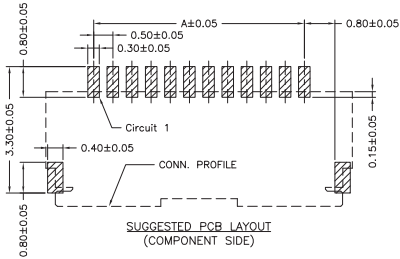

	F0504WR-S-30P						
	N	L	N	G2	G	00	R
①	N	②	L	③	N	④	G2
⑤	G	⑥	00	⑦	R		
① N=Halogen Free ② Material: L=LCP ③ Color: N=Natural(Beige) ④ Plating code: G2=Gold-plated 3u" ⑤ Plating code: G=Gold-flash ⑥ Option code: 00=Standard ⑦ Packing code: R=Tape & Reel							



Ordering Information & Dimensions:

PART NO.	Dimensions		
	A	B	C
F0504WR-S-04P	1.50	4.00	2.57
F0504WR-S-06P	2.50	5.00	3.57
F0504WR-S-09P	4.00	6.50	5.07
F0504WR-S-12P	5.50	8.00	6.57
F0504WR-S-13P	6.00	8.50	7.07
F0504WR-S-17P	8.00	10.50	9.07
F0504WR-S-18P	8.50	11.00	9.57
F0504WR-S-20P	9.50	12.00	10.57
F0504WR-S-22P	10.50	13.00	11.57
F0504WR-S-24P	11.50	14.00	12.57
F0504WR-S-26P	12.50	15.00	13.57
F0504WR-S-27P	13.00	15.50	14.07
F0504WR-S-30P	14.50	17.00	15.57
F0504WR-S-40P	19.50	22.00	20.57
F0504WR-S-50P	24.50	27.00	25.57

Unit:mm